

Precision Universal Tester

Autograph AGS-X Series



Autograph **AGS-X Series**

PRACTICAL TESTING SOLUTIONS



10 kN



20 kN



50 kN

The Shimadzu Autograph AGS-X series provides superior performance and practical testing solutions for a wide array of applications. Offering high-level control and intuitive operation, the AGS-X series sets a new standard for strength evaluations while providing the utmost in safety considerations in a modern, stylish design.

The AGS-X comes standard with industry-leading TRAPEZIUM X-V data processing software. Offering comprehensive functions, TRAPEZIUM X-V offers an unparalleled level of operation. TRAPEZIUM LITE X, Shimadzu's entry-level data processing software, provides enhanced productivity and efficiency for quality control operations.



100 kN



300 kN

Convincing Cost Performance

AGS-X Provides Practical, Affordable Testing Solutions

Easy Control of Stress and Strain

Offers real-time auto tuning of control parameters, based on measured test force and strain data. Safely make comparisons to unknown sample data without the need for preliminary tests. In addition, the AUTOTUNING FUNCTION easily performs strain control, an ISO 6892-2009 requirement.




		Required Needs
IRON & STEEL	In addition to conventional stress control, tensile testing with strain control is increasingly in demand.	ISO 6892 JIS Z2241
PLASTICS & RESIN	Measuring the modulus of elasticity in the ultra-small strain domains proscribed by ISO and JIS standards has become a necessity.	ISO 527 ISO 178 JIS K7171
CERAMICS	Many samples are damaged by microscopic displacements, so accurate control is needed, right from the start of testing.	

Achieve an Accurate S-S Curve with High-Precision Load Cells

±0.5 Load Cell Precision
from 1/500 to 1/1 Load Cell Precision Range
1 msec (1000 Hz) High-Speed Sampling

The wide, guaranteed load cell precision range of 1/500 to 1/1 improves testing efficiency and ensures that virtually all of your testing can be performed without switching the load cell or jig.

Furthermore, high-speed sampling of 1msec ensures no missed strength changes.

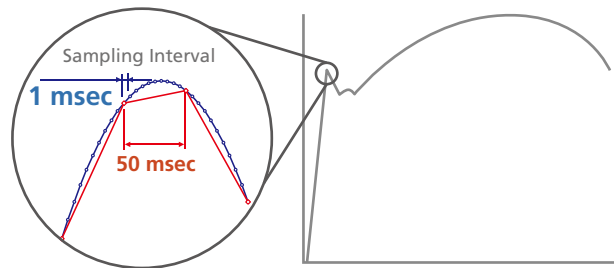

Improved Safety

SAFETY FUNCTION / ONE-TOUCH STROKE LIMIT

The safety function stops the testing machine if force changes exceed a certain level during specimen setting or return.

In addition, setting stroke limiters is easy with one touch of the switch.

SAFETY COVER

Controls scattering of the test specimen during testing. The interlock improves safety: operators can open and close it easily with the slide mechanism.

DUAL EMERGENCY-STOP SWITCHES

Features emergency-stop switches on both sides (20 kN–300 kN frame).


 SHIMADZU



AUTOMATIC AGS-X 100 kN

Smarter Work Space

New and enhanced functions support easier, more efficient testing

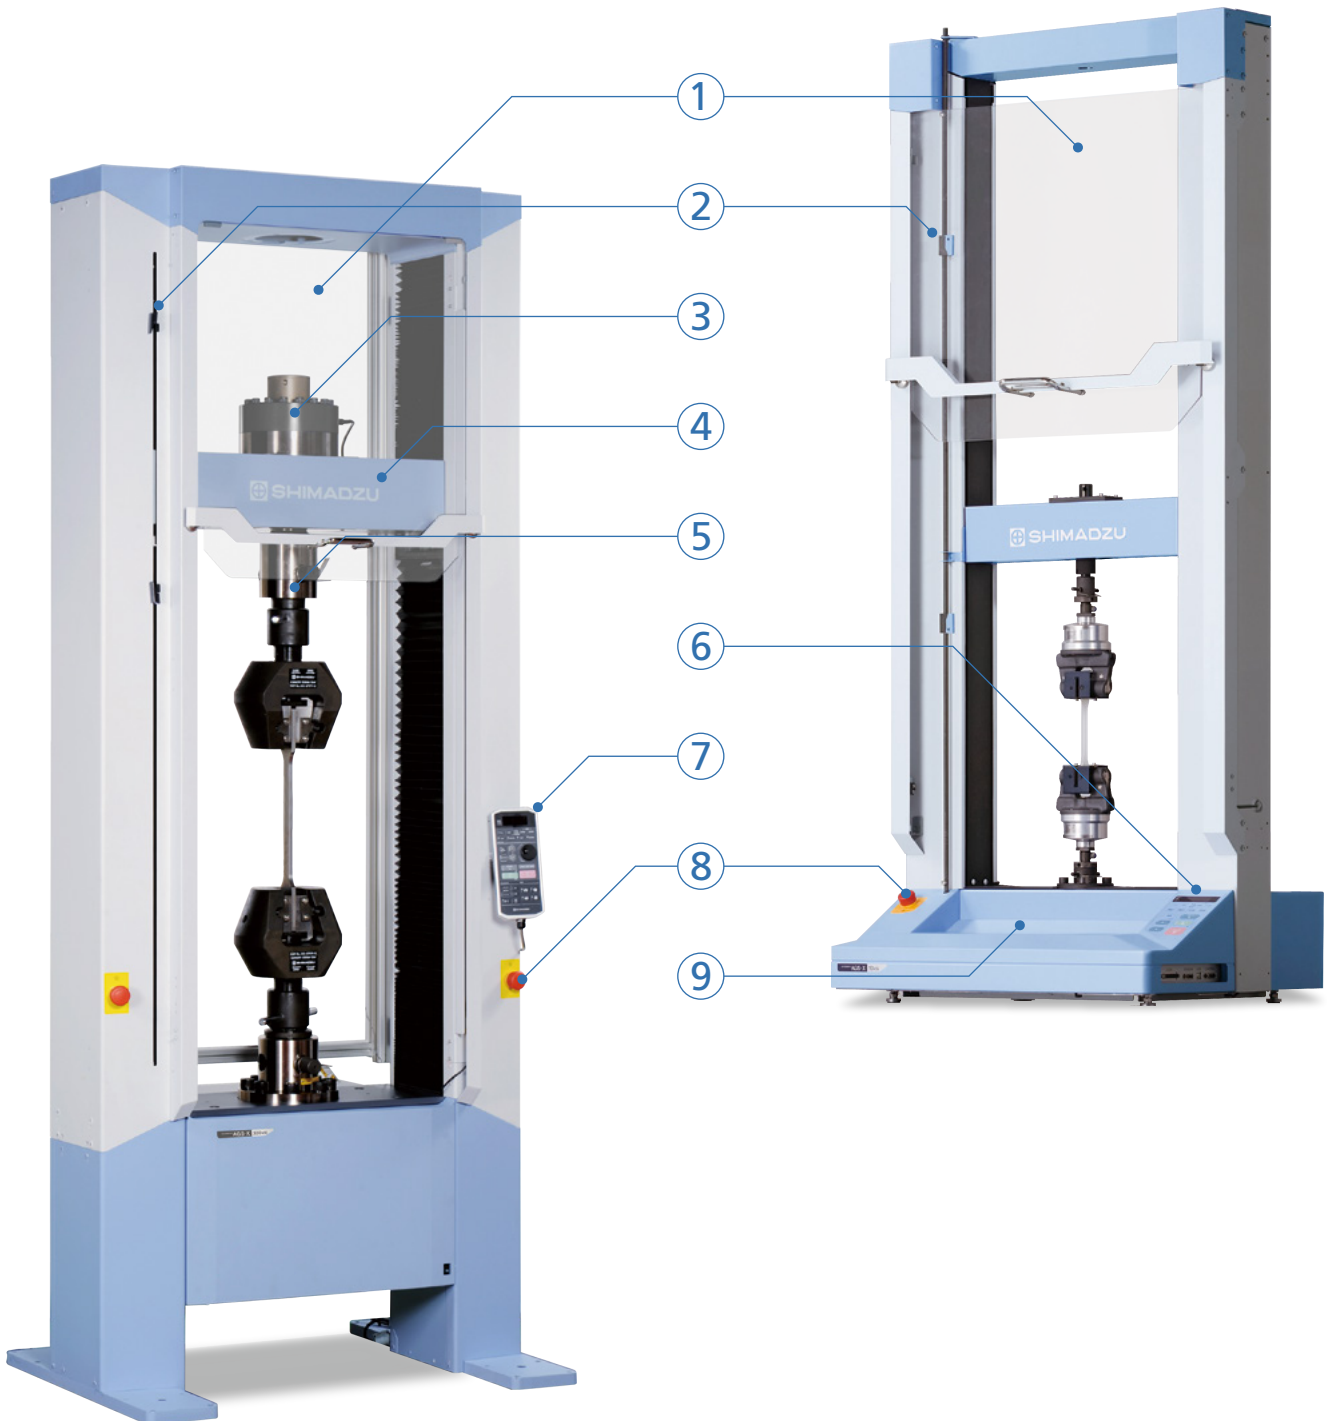

① Safety Guard to Protect Against Flying Debris




A vertically sliding safety guard is available. Opens easily with one hand. When the safety guard is open, an interlock function disables testing and return movement.

② One-Touch Stroke Limiters



Pinch and slide; release to lock. One-touch stroke limiters permit simple one-touch adjustment and firm locking of the crosshead stroke limit positions.

③ Load Cell



For the range of 1/500 to 1/1 of the load cell rating, a single load cell that guarantees test force accuracy to $\pm 0.5\%$ of the indicated value (for high-precision type) covers an extensive testing range. The load cell rated value is stored in the calibration cable and automatically recognized when the cable is connected.

④ Crosshead

Achieves a 1,600 mm/min testing speed and a 2,200 mm/min return speed (20 kN frame), significantly reducing the time required to conduct repetitive testing.

⑤ Common Joint for Both Tensile and Compression Tests (20–300 kN frame)



Adopts a single joint for both tension and compression tests. This makes it easier to exchange jigs. In addition, the joint is set with a nut placed in the upper part of the loading cell, which allows for safe detachment of the joint on the table.

⑥ Built-in Main Operation Panel (for 10 kN frame)



Call up test methods from TRAPEZIUM LITE X to conduct testing.

Naturally, AGS-X can be used as a standalone tester to test specimens using methods created with the tester itself.

⑦ Main Operation Panel



The main operation panel enables the development and storing of test conditions, allowing testing without having to connect to a PC.

Perform various operations with the jog wheel, such as opening and shutting the button for automatic grips or the automatic extensometer.

The main operational panel is movable, allowing convenient adjustment of the angle.

- The controller is needed separately for the automatic opening and shutting of jigs.

⑧ Emergency Stop Button

Reliably cuts off power to the servo amplifier, instantaneously stopping crosshead movement in the event of an emergency.

⑨ Multipurpose Tray (Desk-top frame)



Large space in front of the instrument. Perfect for placing jigs, arranging specimens, or taking notes.

Jog Controller (option for 10 kN frame)



Allows hand-held control of the crosshead position. The jog dial makes fine positioning a breeze, particularly when setting the start position for bending and compression tests.

Quest for Convenience

TRAPEZIUM X-V


Materials Testing Operation Software

Cutting-Edge Software Meets Your Materials Development and Quality Control Needs

Compatible with Windows® 10



Quickly Obtained Data

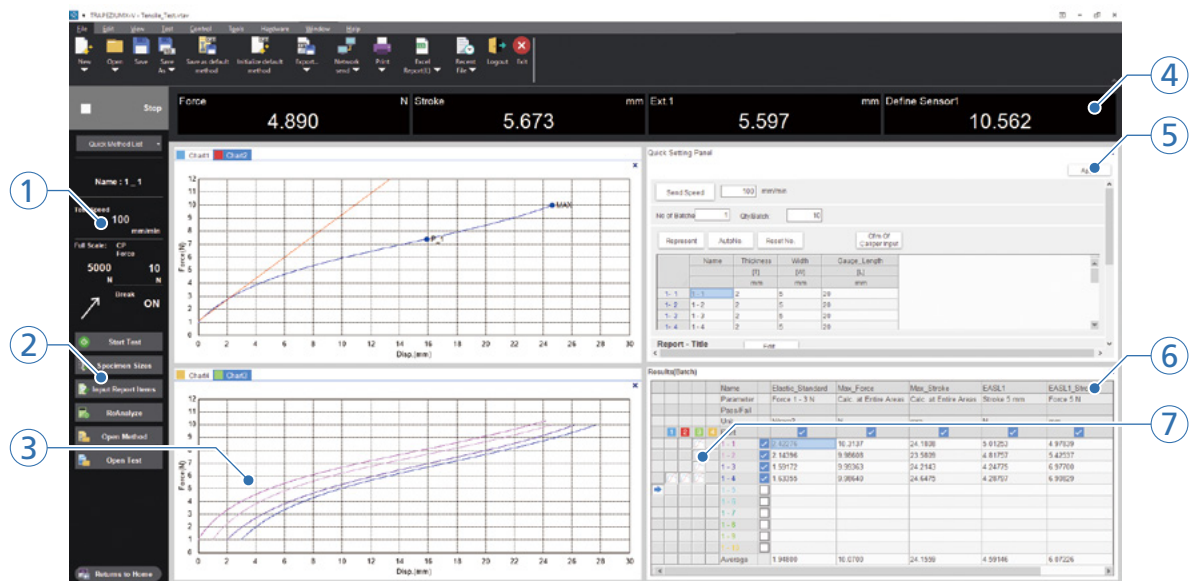

① Test Method & Situation Panel

Confirm testing conditions and the situation from the main window.

② Advanced Navigation System with a Learning Function

The Navigation Bar shows only the functions required for selected situations. In addition, the "Learning Function" records user actions for each situation and adds frequently-used functions as navigation buttons. This improves work efficiency by matching functions to a user's operational style.

③ Multiple Graph Function

Enables displaying up to four graphs. The graph can set two axes, respectively. In addition, a maximum of 50 graphs can be overlaid and point picking allows acquiring the value of a random point. This provides for a more detailed examination.

④ Real-time Data Display Panel

Displays the test force, stroke (strain), extensometer or strain gauge value and other input values, enabling one-window monitoring.

In addition, the random calculation value can be display simultaneously for smooth confirmation of data.

⑤ Quick Panel

Quickly enter the speed, dimension, and report information from the main window.

⑥ Result Panel

In addition to re-testing and extra lot tests, this panel allows changing a variety of settings before and after testing. Specimens can be inserted in any position or added to only a specific batch, and the specimen order can be changed after completing the test.

⑦ Checkbox to Select Display Curve

Intuitive Machine Operation

Visual wizard guidance ensures trouble-free entry of method settings

- Enter complicated method settings using the Method Wizard, which provides an overview of the entire process.
- Setting entry guidance, linked to online help, is available in each window.
- Easy-to-understand illustrations are used in the [Tension], [Specimen], and [Data Processing] windows, greatly simplifying the entry of settings.

The image shows two screenshots of the software interface. The top screenshot is the 'Method Wizard' window, which includes a 'Specimen' section with a diagram of a specimen and a table of specimen data. The bottom screenshot is the 'Data Processing' window, which features a graph of stress-strain curves and a 'Define Formula' section.

Annotations for the top screenshot:

- Displays illustrations for each specimen shape. A single glance shows which dimensions should be entered.
- In addition to manual input, dimensions can be set via [Excel batch reading] or [Automatic input via calipers].
- Enter additional, non-dimensional information for each specimen.

Annotations for the bottom screenshot:

- Prepare data processing items in advance. Simply press buttons on the figure to select settings.
- Illustrations change according to the test mode and specimen material.
- Create random calculation formula using a data processing item or specimen size.

An example of selected plastic (Beside this, rubber and metal are available,)

Perform high-efficiency, continuous testing utilizing fast data searches and one-touch method selection

The image shows the main software interface and a search results window. The main interface has a top bar with 'Force' and 'Stroke' values, and a central area with 'TRAPEZIUMX-V' branding. Below this are several buttons for 'Select Method and Test', 'Open Test', 'Create New Method', 'Open Method', 'Quick Method List', 'User Accounts', 'Hardware Settings', and 'Options'. The search results window shows a list of files with columns for 'File Name', 'Created', 'Modified', and 'Size'.

Annotations for the main interface:

- All Functions
All operations are accessible from a top screen.
- Start testing in just one step after frequently-used methods are recorded in the Quick Method List.

Annotations for the search results window:

- Search Conditions
- Use a keyword or date to quickly search for saved test results and Method files. Also, easily call up files using previews of reports and lists of settings.
- Summary Preview
- Search Result


Generate Detailed Reports

Richly expressive report creation includes free positioning of report elements

Report Designer allows flexible layouts. Create reports that include data, charts, photographs, and logs. Freely change the layout and element size, and use detailed settings for each element's font, color, and ruled line.

Reports can be output in PDF, Microsoft® Word, Excel®, HTML formats.

After exporting, use your everyday software to customize the report.

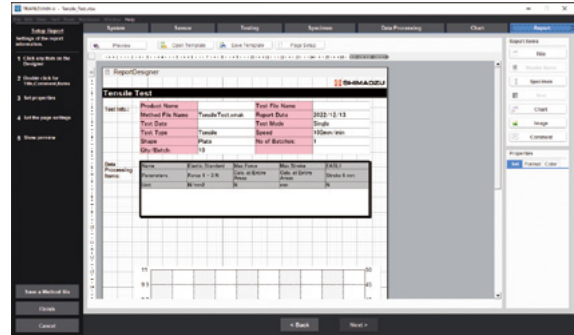


Conventional Process Control Function

Utilize daily test records to create an XBar-R control chart using data that has been extracted for a certain period.

Daily test result statistics are available in various units, including date, specimen, batch, etc. The statistical result is displayed on the screen.

It is possible to print them by adding the text and to output it as a PDF file.

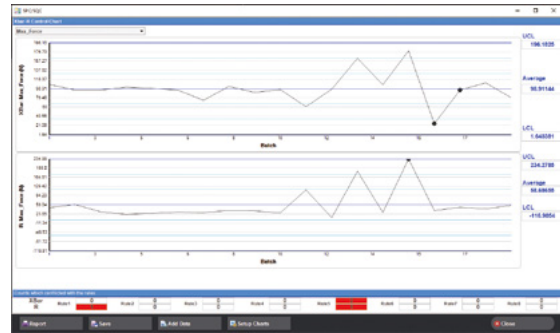

Choose from Five Software Components to Fit Your Specific Application

When multiple software components are purchased, easily switch between modes at a single touch, without starting up separate software.

Single Software

Performs general single-direction testing. Examples include tensile, compression, bending and peeling tests.



Cycle Software

Similar to endurance testing, this software is used for testing where force is repeatedly applied and then released.



Control Software

Creates any testing machine operation pattern. Perform foam rubber compression and holding cycle tests.



Texture Software

Measures the features (texture) of foods and pharmaceuticals. Produce special data processing results, including mastication, jelly strength and adhesion.



Spring Software

Enables the testing of springs. Both the characteristic values specific to springs and the spring height and length can be measured.

Simple Software Improves Productivity




Compatible with Windows® 10



Improves Productivity and Efficiency of Quality Control

Performs general single-direction testing. Examples include tensile, compression, bending and peeling tests.

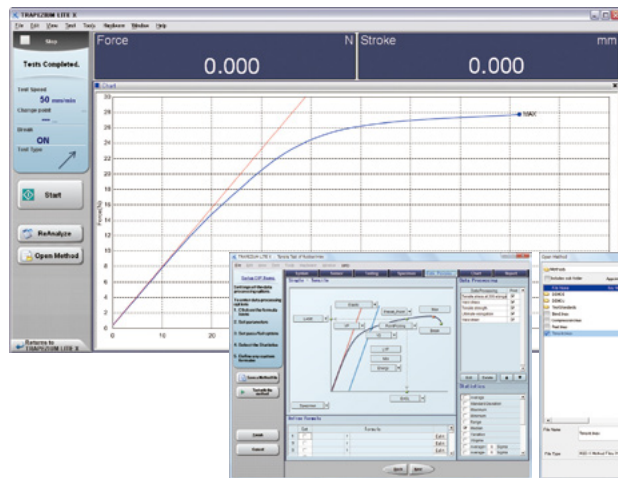

Simple Screen Layout

Few buttons ensure easily navigated operations
One-touch test method selection

Supports Industry Standards

Recording convenient test method files enables instant testing

Includes test method files for rubbers, plastics, and films that comply with JIS/ISO/ASTM standards. The terminology and data processing items specified in the respective test standard are pre-registered in the respective test method file to permit smooth testing in compliance with the standards.

“Quick Method List” Makes Testing Easy

No mouse or keyboard required

Register often-used test methods to the Quick Method List to start testing instantly. The registered test methods can be directly selected or edited at the AGS-X tester, making testing easy even for users who find using a PC troublesome.





Macros Enhance Work Efficiency

Just set up the test and start testing.

All tedious operations have been automated.

The sequence of operations frequently conducted after testing can be fully automated. Functions for coordinating with the AGS-X permit saving of test data and report generation and printing without touching a PC.




Examples of Macros

Statistical Process Control Functions

Effectively utilize daily test results.

Extract and compile test results over a fixed period to create histograms and XBar-R control charts. Compile statistics on daily test results by date, specimen, or batch, and display the results on screen. Add text to statistical information for printing or output to a PDF file.

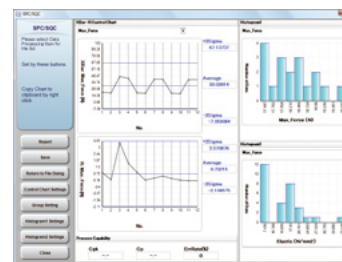

Accessories

Experience the range of possibilities available with this full-featured system



AGS-300kNX
+ 300kN Non-Shift Wedge Type Grips



AGS-10kNX
+ 1kN Parallel Tightening Grips
+ DSES-1000 Extensometer for soft specimens

■ Grips

Used to grip the sample, a wide variety is available to accommodate different specimen types and test force amounts.

Non-Shift Wedge Type Grips <MWG>

Plastics Metals Lumber

Grip capacity	Standard grip face				Upper grip weight (kg)
	Grip face	Clearance (mm)	Grip width (mm)	Grip length (mm)	
300 kN	File teeth for flat specimens	0 to 8.5	50	75	33
250 kN		0 to 8.5	50	75	33
100 kN		0 to 7	40	55	10
50 kN		0 to 7	40	55	9.5
20 kN		0 to 7	25	55	3.6
5 kN		0 to 7	25	55	3.6



Non-Shift Wedge Type Grips

Pneumatic Flat Grips <PFG>

Plastics Rubber Textiles Cloth Paper Film

Grip capacity	External dimensions (mm)		Grip width (mm)	Clearance (mm)	Upper grip weight (kg)
	W	L (upper/lower)			
10 kN	154	268.5 / 278.5	60	0 to 10	—
5 kN	154	224 / 235	60	0 to 6	5.7
1 kN	102	163 / 174	50	0 to 6	1.7
50 N	64	118 / 135	35	0 to 6	0.4



Pneumatic Flat Grips

* Grips with foot-valve units and crosshead-linked control functions are also available.

* Grips can be opened and closed via the Smart Controller when using the crosshead-linked control kit.


Screw-Type Flat Grips <SCG>

Plastics Rubber Textiles Cloth Paper

Grip capacity	Standard grip face				Upper grip weight (kg)
	Grip face	Clearance (mm)	Grip width (mm)	Grip length (mm)	
5 kN	File teeth	0 to 16	60	50	2
1 kN		0 to 15	50	30	0.7
50 N	Flat	0 to 14	35	25	0.3



Screw-Type Flat Grips



Parallel Tightening Grips

Parallel Tightening Grips

Plastics Metals Lumber

Grip capacity	Size (mm)		Grip face width and length (mm)	Face clearance (mm)	Upper grip weight (kg)
	W	L			
300 kN	574	440	60, 90	0 to 60	170
100 kN	446	310	40, 70	0 to 40	90

* Requires a separate hydraulic unit

* Optional compression jigs and bending jigs that can be connected directly to the grips are also available.

Compression plate

Plastics Metals Rubber Lumber Cement

Used to compress the specimen, several type are available to accommodate different specimens and test force amounts.

Fixed Type

Maximum capacity	Upper plate dimensions (mm) diameter by thickness	Upper plate mass (kg)	Operational temperature (°C)
250 kN	ø100 × 25	1.6	0 to 40
	ø50 × 25	0.5	
	ø200 × 40	6.3	



Fixed-Type Compression Plates



Spherical Seat-Type Compression Plates

Spherical Seat Type

Maximum capacity	Upper plate dimensions (mm)	Upper plate mass (kg)	Operational temperature (°C)
250 kN	ø100	3.8	0 to 40

* With spherical compression plates, only the upper plate is spherical. Spherical seat-type compression plates provide contact flexibility for uniform load application.

* Select the kit number that corresponds to the load cell used.

Bending tests

Plastics

Simply attach the bending test jig kit to the main unit to perform bending testing.


Max. test force	Punch tip radius × width (mm)	Support tip radius × width (mm)	Support spacing (mm)	Operational temperature (°C)	Applicable test standards
10 kN	R5 × 34	R2 × 34	20 to 200	0 to 40	JIS K6911, JIS K6902*1, JIS C6481*2, JIS K7171, ISO 178, Specimens with thickness of 3 mm or less
		R5 × 34			JIS K7171, ISO 178, Specimens with thickness above 3 mm
R1/8" × 72	R1/8" × 110	0.8 to 8"	ASTM D790 (Test method 1)		
100 kN	R5 × 72	R2 × 110	50 to 500		JIS K6911, JIS K6902*1, JIS C6481*2, JIS K7171, ISO 178, Specimens with thickness of 3 mm or less
		R5 × 110			JIS K7171, ISO 178, Specimens with thickness above 3 mm
	R1/8" × 72	R1/8" × 110	2 to 20"		ASTM D790 (Test method 1*3)

*1 Corresponds to bending strength. Compatible with support spacing from 20 mm to 200 mm.


*2 Corresponds to bending strength.

*3 Compatible with support spacing from 2 inches to 20 inches.

Requires an adaptor when the SIE or SES extensometer is used.



Three-point Bending Test Jig for Plastics



Deflection Measuring Device with Three-point Bending Jig for Plastics

Deflection Measuring Device for Three-point Bending Test

Plastics

Applicable to the ISO 178 three-point bending test, it is possible to use this device with plastic three-point bending jigs.

Applicable to ISO 178 Modulus measurement

■ Precise Measurement of Displacement



AGS-10kNXD
+ Pneumatic Flat Grips
+ TRViewX Non-Contact Digital Video Extensometer

Class 0.5

Plastics Metal Metal Foil Rubber Film

TRViewX Non-Contact Digital Video Extensometer



Conducts accurate gauge length elongation measurements on specimens, based on CCD camera images, over an extensive range.

	Model	Camera Field-of-View (GL + elongation)
Single camera (TRViewX S Series)	TRViewX555	55 mm ^{*1}
	TRViewX1205	120 mm ^{*1}
	TRViewX2405	240 mm ^{*1}
	TRViewX5005	500 mm
	TRViewX8005	800 mm
	Model	Camera Field-of-View (GL + elongation)
Double camera ^{*2} (TRViewX D Series)	TRViewX500D	Camera 1: 120 mm ^{*1} Camera 2: 500 mm
	TRViewX800D	Camera 1: 120 mm ^{*1} Camera 2: 800 mm

^{*1} Elongation accuracy at normal temperatures is ISO Class 0.5 compliant.
^{*2} With the double camera model, camera 1 takes measurements with a field of view up to 120 mm, beyond which the system switches to camera 2. Select models 500D/800D if you require a wide field of view (500 mm/800 mm) and Class 0.5 compliance up to a 120 mm field of view.

Class 0.5


Plastics Metal



SIE Series Automatic Extensometer

Automatic gauge position detection, gauge length setting, and arm clamping and unclamping of specimen.

Plastics Rubber



DSES-1000 Extensometer for Soft Specimens

Easily and accurately measures large elongation amounts. 1000 mm Maximum Movement Distance, ±0.2% Relative Elongation Measurement Precision.

Class 0.5

Plastics Metal



SSG-H Series Strain Gauge One-touch Extensometer

Lightweight, compact extensometer that can be attached or removed by a simple, one-touch operation.

* Requires external amplifier (option).

Class 1


Metal



DT Series Differential Transformer Type Extensometers

Applicable to the elongation measurement of metal. Maximum diameter, thickness 45 mm Compliant with Strain Rate Control Test Methods ISO 6892

Plastics Metal Rubber Lumber



Compression Plate Displacement Measurement Device

Measures displacement of compression plates during compression tests.

Plastics Metal Rubber



Strain Gauge Type Width Sensor

Measures changes in specimen width.

■ Testing in Controlled Environments



AGS-10kNXD
+ Screw Type Flat Grips
+ TCE series Compact Thermostatic Chamber

Temperature Range -70 °C to +300 °C

TCE Series Compact Thermostatic Chamber


Enables testing across a temperature range of -70 °C to +300 °C. +125 mm and +250 mm extension models are also available.



Temperature Range +20 °C to 60 °C
(-40 °C to 250 °C with no humidity control)
Humidity Range 40% to 95%

Refrigerator Type Environmental Temperature and Humidity Chamber

Optimal chamber for testing materials with mechanical properties sensitive to temperature and humidity effects, such as fibers, paper, or films.
Temperature regulation: Automatic control by heater and refrigerator.



Temperature Range -70 °C to +280 °C

TCL, TCH Series Gas Jet Type Thermostatic Chamber


Liquid nitrogen or carbon dioxide is injected to lower the temperature. Offers colder testing environments than the refrigerator type.
Heating: Heater; Cooling: Liquid nitrogen or CO₂ injection



■ Jigs for Specific Testing and Specimen Shapes

Pneumatic Capstan Grips for Yarn

These grips grip a yarn or cord specimen from the capstan (winch). The pneumatic operation allows application of an initial test force.



Yarn


Cord

JIS Z0237

JIS Z1528

Adhesive Tape Peeling Test Device

The sample table slides in synchronization with the upper grip movement to maintain a 90° peeling angle. Peeling test jig compliant with JIS Z0237 and JIS Z1528.



Adhesive tape

Adhesive sheet

ASTM 1894


JIS K7312

ISO 8295

JIS K7125

Friction Modulus Test Device

For measurements of the coefficient of sliding friction between identical plastics or films or between different materials across the continuous range from static friction to dynamic friction. Two versions: compliant with JIS K7312 / ASTM 1894 and compliant with JIS K7125 / ISO 8295.



Plastics

Film

ISO 37

ASTM D412

JIS K6251 / JIS K7312

1 kN Roller Grips

The O-ring is hooked onto rollers, which rotate during tensile testing. Conforms to JIS K6251, JIS K7312, ISO 37, and ASTM D412 test standards.



O-ring


● Jigs for CFRP Testing Standards

CFRP

ASTM D6484 / D6484M

Open-Hole Compression Strength Testing on Polymer Matrix Composite Laminate

ASTM D6484 is a typical method used to determine the compressive strength of CFRP open-hole samples.



ASTM D7137 / D7137M

Testing the Compressive Residual Strength Characteristics of a Damaged Polymer Matrix Composite Plate

The testing is performed on rectangular samples made of composite materials that have already been subjected to impact testing. The sample is mounted on the jig and subjected to compression loads.



ASTM D5379 / D5379M

JIS K7079-2

In-Plane Shear Testing Double-V-Notched Sample Shearing

The in-plane shear strength, in-plane shear fracture strain, and in-plane shear elastic modulus of carbon-fiber-reinforced plastics can be determined by the Iosipescu test, which is an in-plane shear test on double-V-notched samples.



ASTM D7078 / D7078M

V-Notched Rail Shear Testing and Evaluation of Composites

This testing applies shear forces to mounted samples with 90-degree V-notches at the top and bottom.




Options

■ Optional Frames for AGS-X Series

Capacity	10 kN	20 kN	50 kN	100 kN	250 kN/300 kN
Reinforced Yoke Specification	✓	-	-	-	-
+250 mm Extended Column	✓	-	-	✓	-
+500 mm Extended Column	✓	✓	✓	-	-


Reinforced Yoke Options

Permits tensile testing in the download direction. (Only for 10 kN model)

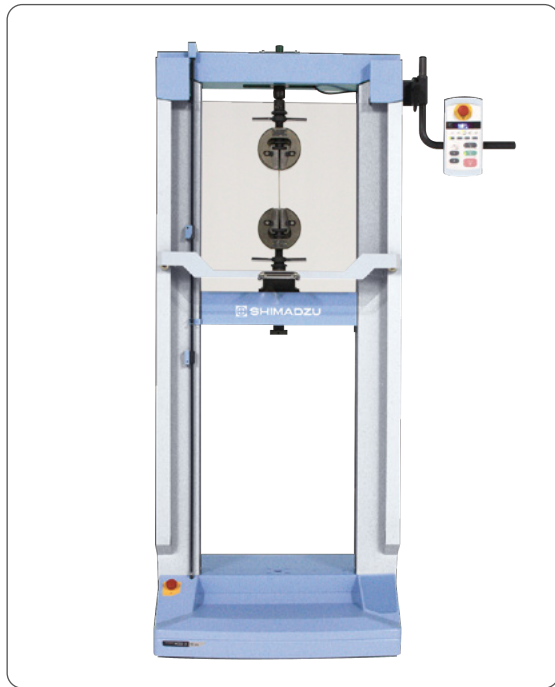

Extended Column Options

For testing with a longer test stroke.

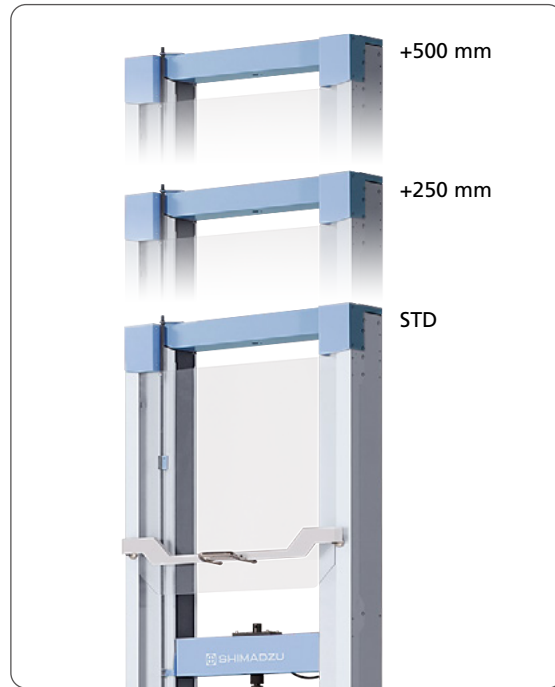

■ Options for AGS-10kNX Frame



Jog Controller

The jog dial allows manual positioning of the crosshead.



Power Cable

EU specification (VDE standard)
Chinese specification (GB standard)
Japanese, N. American specification (UL, CSA, PSE standards)
supplied as standard.

■ Options for AGS-X Series



Control I/O Box

Expands the number of control I/O ports to four. Multiple options can be simultaneously connected to the control I/O ports.



Sensor I/O Box

Expands the number of sensor I/O ports to two. Multiple options can be simultaneously connected to the sensor I/O ports. BNC cables can be connected to the analog I/O ports (2 ports each).

Other options are also available. For details, refer to the separate catalog (Shimadzu Autograph Optional Accessories).

AGS-X Series Specifications



AGS-10kNX



AGS-20kNX

Model		Table-top Type	
		AGS-10kNX	AGS-20kNX
Max. Load Capacity		10 kN	20 kN
Lineup of Models Differing by Load Cell Capacity		1 N / 2 N / 5 N / 10 N / 20 N / 50 N 100 N / 500 N / 1 kN / 5 kN / 10 kN	20 kN
Force Measurement	Accuracy	High-Precision Type (1/500, ±0.5%)	Within ±0.5% indicated test force (at 1/500 to 1/1 load cell rating) Conforms to EN 10002-2 Grade 0.5, ISO 7500-1 Class 0.5, BS 1610 Class 0.5, ASTM E4, and JIS B7721 Class 0.5. *1
		Standard-Precision Type (1/500, ±1%)	Within ±1% indicated test force (at 1/500 to 1/1 load cell rating) Conforms to EN 10002-2 Grade 1, ISO 7500-1 Class 1, BS 1610 Class 1, ASTM E4, and JIS B7721 Class 1. *1
	Calibration		Automatic test force calibration: select tensile, compression, or tensile and compression
	Crosshead	Speed Range	0.001 to 1000 mm/min (stepless)
	Max. Return Speed	1500 mm/min	2200 mm/min
Crosshead Speed Accuracy *2		±0.1%	
Crosshead Speed and Permitted Test Force		±0.1% To load cell capacity across entire speed range	
Crosshead – Table Distance (Tensile stroke) *3		1200 mm (760 mm, MWG)	1250 mm (765 mm, MWG)
Effective Test Width		425 mm	
Crosshead Position Detection	Measurement Method	Optical encoder	
	Display Method	Digital display (display resolution: 0.001 mm)	
	Positional Accuracy	±0.1% indicated value or ±0.01 mm, whichever is larger	
Data Capture Rate	1000 Hz max. *4		
Test Method Files	40 files (PC link: 20 files, standalone controller: 20 files)		
Standard Functions		<ul style="list-style-type: none"> Automatic reading of load cell characteristic values Test force display, stress display, stroke display, position display External analog output (2 channels) External analog input (2 channels) *4 External digital input (2 channels) *4 Analog recorder (option) output Dataletty (option) output *5 	<ul style="list-style-type: none"> Automatic test force / stress control (Autotuning) Automatic strain control (Autotuning) *4 Test force auto-zeroing Test force auto-calibration Break detection, auto-return Load cell overload detection Touch-load detection function
Accessories		Load cell (with CAL cable), Power cable (2.5 m), turning rod, cable clamps, instruction manual	Load Cell (with CAL cable), Power cable (5 m), turning rod, cable clamps, instruction manual
Dimensions		<p>*Special-purpose desk (option) (Unit: mm)</p> <p>W653 × D520 × H1603 mm</p>	<p>*Special-purpose desk (option) (Unit: mm)</p> <p>W718 × D641 × H1633 mm</p>
Weight		85 kg	235 kg
Power Requirements		Single phase 100/120/220/240 V AC (switching type) 50/60 Hz 1.2 kVA	Single phase AC 200–230 50/60 Hz 4.0 kVA
		Supply voltage fluctuations within ±10% of the set value. D-class (100 Ω max.) grounding resistance.	
Operating Environment		Temperature: 5 °C to 40 °C; Humidity: 20% to 80% (no condensation) Floor vibrations: frequency 10 Hz max., amplitude 5 μm max.	

*1 Official certification after installation is recommended to comply with EN 10002-2, ISO 7500-1, ASTM E4 standards, and JIS B7721.

*2 Crosshead speed accuracy is calculated from the crosshead travel within a prescribed time at a constant speed between 0.5 mm/minute and 500 mm/minute.

*3 The tensile stroke is the effective stroke when SCG (screw-type flat grips) or MWG (non-shift wedge-type grips) are mounted.



AGS-50kNX



AGS-100kNX



AGS-300kNX

Table-top Type	Floor Type	
AGS-50kNX	AGS-100kNX	AGS-300kNX
50 kN	100 kN	300 kN
50 kN	100 kN	300 kN
Within ±0.5% indicated test force (at 1/500 to 1/1 load cell rating)		Within ±0.5% indicated test force (at 1/250 to 1/1 load cell rating)

Conforms to EN 10002-2 Grade 0.5, ISO 7500-1 Class 0.5, BS 1610 Class 0.5, ASTM E4, and JIS B7721 Class 0.5. *1

Within ±1% indicated test force (at 1/500 to 1/1 load cell rating)

Conforms to EN 10002-2 Grade 1, ISO 7500-1 Class 1, BS 1610 Class 1, ASTM E4, and JIS B7721 Class 1. *1

Automatic test force calibration: select tensile, compression, or tensile and compression

0.001 to 800 mm/min (stepless)	0.001 to 500 mm/min (stepless)
1100 mm/min	550 mm/min
±0.1%	

To load cell capacity across entire speed range

0.001–200 kN: 0.001–500 mm/min (entire speed range)
200–300 kN: 0.001–400 mm/min

1210 mm (745 mm, MWG)	1255 mm (745 mm, MWG)	1475 mm (635 mm, MWG)
425 mm	600 mm	

Optical encoder

Digital display (display resolution: 0.001 mm)


±0.1% indicated value or ±0.01 mm, whichever is larger

1000 Hz max. *4

40 files (PC link: 20 files, standalone controller: 20 files)

- Automatic reading of load cell characteristic values
- Test force display, stress display, stroke display, position display
- External analog output (2 channels)
- External analog input (2 channels) *4
- External digital input (2 channels) *4
- Analog recorder (option) output
- Dataletty (option) output *5
- Automatic test force / stress control (Autotuning)
- Automatic strain control (Autotuning) *4
- Test force auto-zeroing
- Test force auto-calibration
- Break detection, auto-return
- Load cell overload detection
- Touch-load detection function


Load Cell (with CAL cable), Power cable (5 m), turning rod, cable clamps, instruction manual

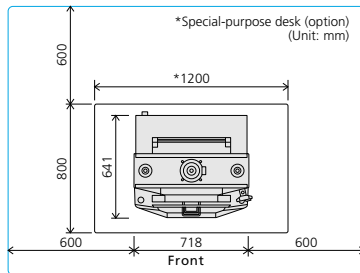

W718 × D641 × H1633 mm

260 kg


Single phase AC 200–230 V
50/60 Hz 4.0 kVA

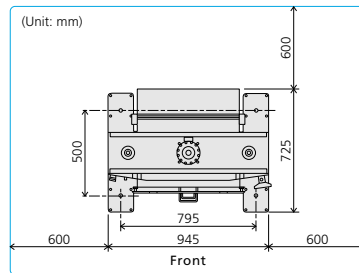

W945 × D725 × H2164 mm

525 kg

400 V model:
Three phases AC 380–440 V 50/60 Hz 4.5 kVA
200 V model:
Three phases AC 200–230 V 50/60 Hz 6.5 kVA

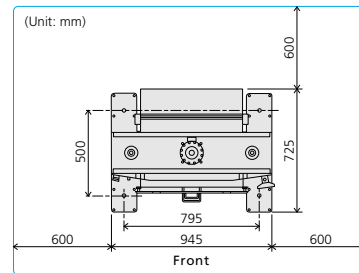

W945 × D725 × H2414 mm

675 kg

400 V model:
Three phases AC 380–440 V 50/60 Hz 5.5 kVA
200 V model:
Three phases AC 200–230 V 50/60 Hz 7.5 kVA

Supply voltage fluctuations within ±10% of the set value.

D-class (100 Ω max.) grounding resistance.

400 V model: C-class (10 Ω max.) grounding resistance.
200 V model: D-class (100 Ω max.) grounding resistance.

Temperature: 5 °C to 40 °C; Humidity: 20% to 80% (no condensation)

Floor vibrations: frequency 10 Hz max., amplitude 5 μm max.

*4 TRAPEZIUM X-V or TRAPEZIUM LITE X is needed for these functions. Moreover, when automatic test force/stress control (auto tuning) and the automatic strain control (auto tuning) are used, the sampling speed becomes 10 msec.

*5 Dataletty (option) and TRAPEZIUM X-V / TRAPEZIUM LITE X can not be used together.

Testing and Evaluation Machines

Precision Universal Tester
AGX™ -V2 series



Small Table-Top Tester
EZ Test



Universal Testing Machines
UH-X/FX series



Micro Hardness Tester
HMV-G series



Dynamic Ultra Micro Hardness Tester
DUH-211 series



Electromagnetic Force
Fatigue/Endurance Testing System
Servopulser EMT series



Testing Machine Configurator

<https://www.shimadzu.com/an/test/tmc/>

You can create your own customized testing system. ▶



▲ Scan here for more information

AGX is a trademark of Shimadzu Corporation or its affiliated companies in Japan and/or other countries.
Microsoft, Excel and Windows are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.



Shimadzu Corporation
www.shimadzu.com/an/

For Research Use Only. Not for use in diagnostic procedures.

This publication may contain references to products that are not available in your country. Please contact us to check the availability of these products in your country.

Company names, products/service names and logos used in this publication are trademarks and trade names of Shimadzu Corporation, its subsidiaries or its affiliates, whether or not they are used with trademark symbol "TM" or "®". Third-party trademarks and trade names may be used in this publication to refer to either the entities or their products/services, whether or not they are used with trademark symbol "TM" or "®". Shimadzu disclaims any proprietary interest in trademarks and trade names other than its own.

The contents of this publication are provided to you "as is" without warranty of any kind, and are subject to change without notice. Shimadzu does not assume any responsibility or liability for any damage, whether direct or indirect, relating to the use of this publication.